

# MARION COUNTY SURVEYOR'S OFFICE



## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 9 TWN. 15<sub>N</sub> RNG. 2<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 5-20-09  
Party Chief: Greene  
Crew: Taylor / Finney  
Type of Marker: Harrison  
Method of Establishment: County: 6-3-97 (EDM)  
IN S.P.C. E Zone, NAD 83  
Name: 15020902  
N: 501 500.822 5(m)  
E: 44 243.950 2(m)

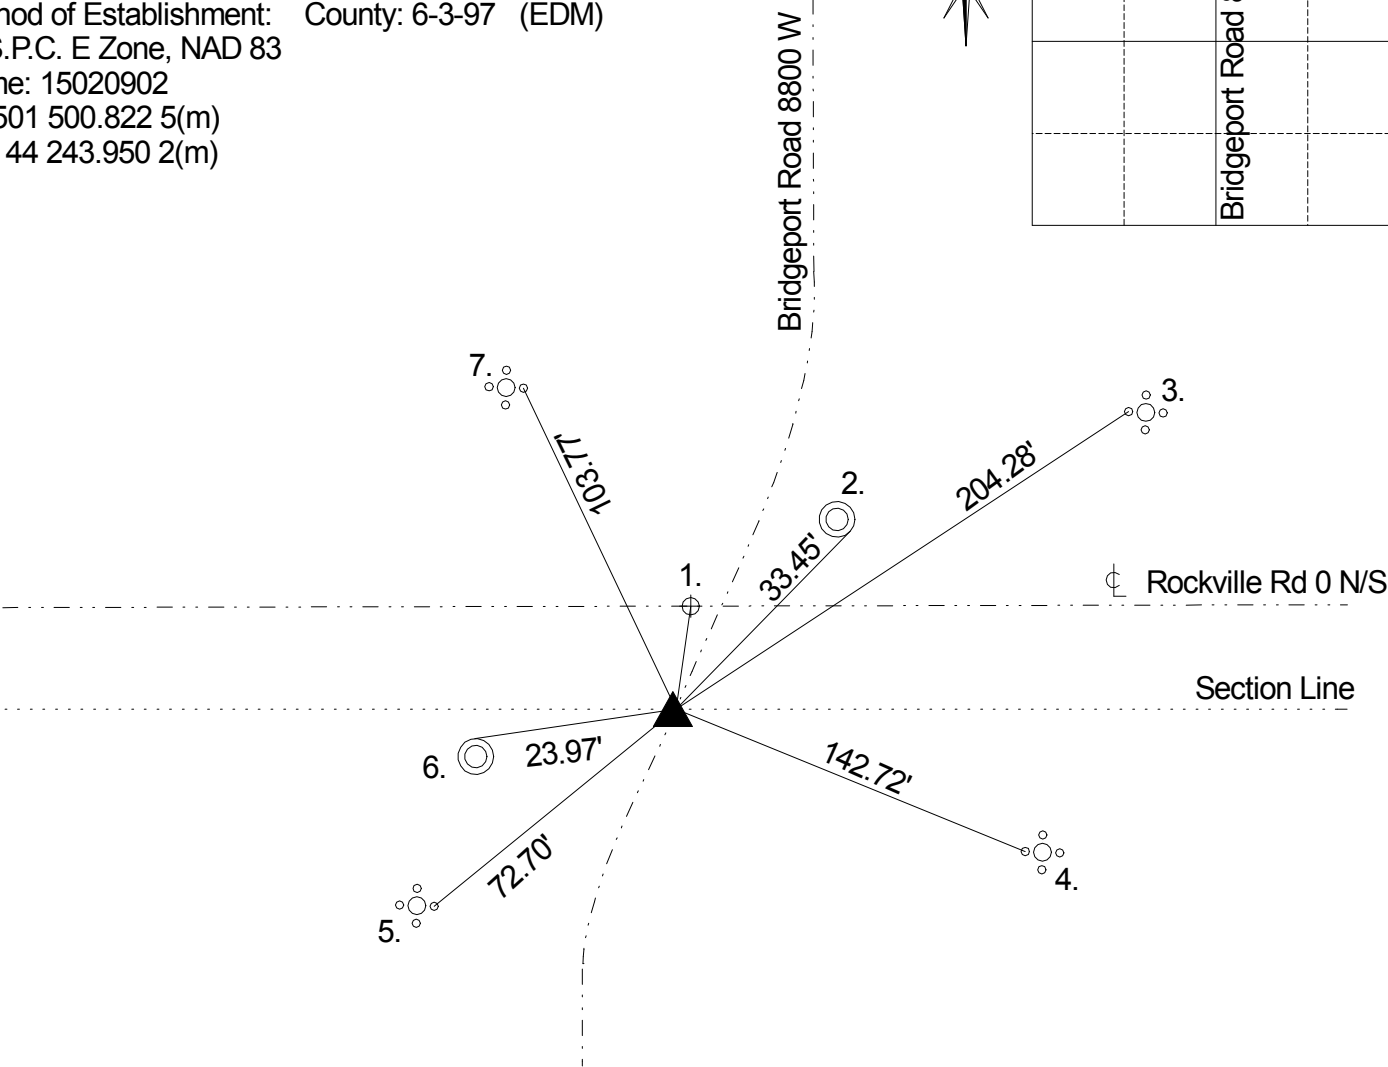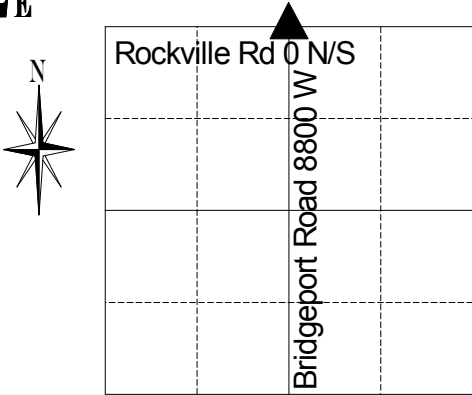

Original post set 1820 by Laughlin with witnesses: 6" ironwood S 55 E 6 links, 8" beech N 7 W 12 links per Marion County Atlas pg. 2. Coyner 4/19 - 4/21/1900 called stake set with no witnesses per Wayne Township Legal Survey Book pg. 88. Thompson 9-7-1943 called a nail. Monroe 6-9-52 called same. Monroe 3-2-58 called same. Miller 4-15-75 called PK nail 2" down. Wilcoxen 11-3-76 called brass plug. Ross 8-15-86 called same. Kiste 7-13-95 called same. Excavated by Wilcoxen 6-3-97 and Harrison set in position of brass plug. Set in accordance with Rockville Rd construction project. Retied 7-13-97 by Wilcoxen. Retied 5-20-09 by Greene.

REF.	DISTANCE	DESCRIPTION
1.	17.6' +/-	Due N to C/L of Rockville Rd
2.	33.45'	Cut 'x' SE rim sewer manhole
3.	204.28'	Cut 'x' W bolt aluminum pole
4.	142.72'	Cut 'x' W bolt aluminum pole
5.	72.70'	Cut 'x' E bolt aluminum pole
6.	23.97'	Cut 'x' N rim Bell telephone manhole
7.	103.77'	Cut 'x' E bolt aluminum pole